



18 DSO 05

MOUNTING POST

FREE-STANDING FOR INTERCOM STATIONS

The free-standing mounting post is used in areas where you cannot directly mount the intercom station to a wall or steel I-beams. They are made of sheet steel and are directly bolted to the ground. You can mount a single intercom station to it. The cable is fed through the bottom of the mounting post.

The mounting post can be combined with an acoustic hood for high ambient noise environments. Additionally, you can mount acoustic or visual signaling devices.



- For free-standing mounting of INDUSTRONIC intercom stations of the DA(E)/DX(E) 0x5, DA(E)/DX(E) 7x5 and NRO xx2 series
- Cable entry at the bottom
- Ideal for gates or entrance areas
- Can be combined with acoustic hood
- Additional signaling devices can be mounted

MECHANISCHE DATEN




Material	Sheet steel
Thickness of sheet steel	2.5 mm (0.10")
Width x height x depth of post	170 mm x 1780 mm x 90 mm (6.69" x 70.08" x 3.54")
Width x height x depth of base	243 mm x 5 mm x 208 mm (9.57" x 0.20" x 8.19")
Weight (without intercom station)	Approx. 17.4 kg (approx. 38.36 lbs)
Colors	Orange, red

ORDER DATA

Color	Construction	Type Number
Orange	without mounting brackets for acoustic hood	212-342-100
	with mounting brackets for acoustic hood	212-342-300
Red	without mounting brackets for acoustic hood	212-342-200
	with mounting brackets for acoustic hood	212-342-400



DIMENSIONS

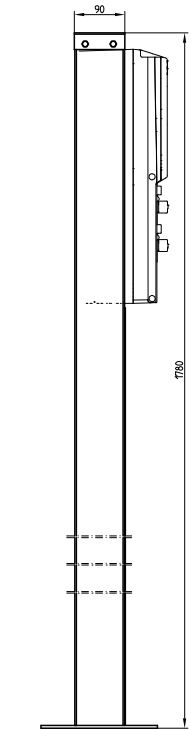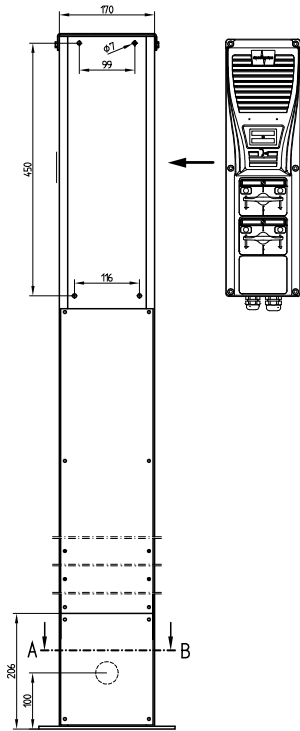

APPLICATION



© INDUSTRIKONIC