

AP 7x1

ACCESS PANEL

IP DESKTOP INTERCOM STATION FOR USE IN CONTROL ROOMS, CONTROL CENTERS, OR MEASURING STATIONS

The compact design includes a color touch display with easy-to-use menu and dial keypad as well as mechanical keys with multi-color status indication. The device status is indicated via 3 LEDs.

The intercom station of type x AP 711 provides two network interfaces which allow for a redundant network access. If one network interface fails, data is transmitted via the second one.

The modular design allows for further flexibility: You can connect a handset and up to 4 additional keypads to the desktop intercom station at any time.

Its connectivity and health status is constantly monitored, logged and flexibly notified system-internally and to third-party systems.



- Resistive color touch display for flexible operation with finger, industrial gloves, and stylus pen
- Touch display layout individually configurable:
1 operating layer with 20 display buttons, dial keypad, and service layer, can be extended to up to 10 operating layers with 20 display buttons each
- 12 mechanical keys with multi-color status indication (e.g. call signaling) and 3 function keys
- Individual button labeling with different characters possible, e.g. Cyrillic
- Audio bandwidth of up to 16 kHz
- PoE or external power supply
- Redundant network interface at type x AP 711
- Light sensor to automatically adjust the light intensity of the touch display and keys
- Self-diagnostics by monitoring of internal electronics, microphone and network connectivity



12 AP 701H



36 AP 701



36 AP 701H

SPEAKER AND MICROPHONE REDUNDANCY

The gooseneck microphone is monitored. In case of a microphone failure, the conversation automatically switches to the integrated additional microphone. Together with the redundant speaker this ensures a reliable voice transmission even in case of a failure.

MICROPHONE ILLUMINATED RING

The installed microphone illuminated ring indicates if the gooseneck microphone is active, inactive, or failed.



INTEGRATED WEB INTERFACE

With the integrated web interface you can view fault and error messages or update the system software.

Invoke and use it with a standard web browser.




REDUNDANT NETWORK INTERFACE

The intercom station of type x AP 711 provides two network interfaces which allow for a redundant network access. If one network interface fails, data is transmitted via the second one.



EASILY EXPANDABLE

Based on customer or application requirements the intercom station can be expanded with a handset and up to 4 additional keypads. Thus a total of 108 mechanical keys is possible.

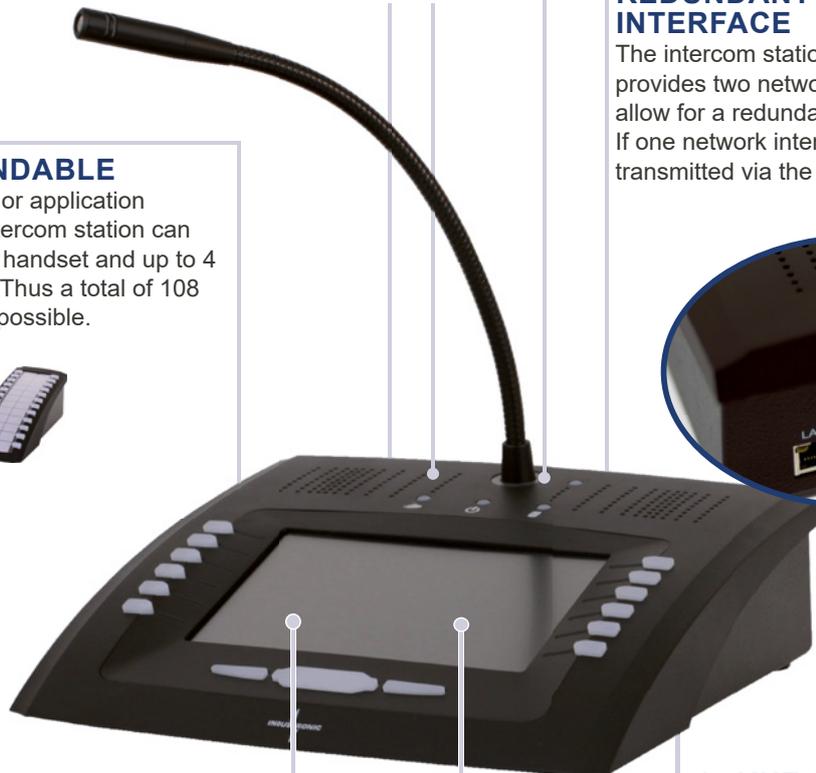

16 KHZ AUDIO BANDWIDTH

The 16 kHz audio bandwidth ensures highest intelligibility and clarity of speech, even in high ambient noise areas.

FLEXIBLE

The basic configuration of the IP desktop intercom station has one operating layer with up to 20 freely programmable display buttons, dial keypad, and service layer.

To implement more complex communication solutions, upgrade the touch display to up to 10 operating layers with up to 200 display buttons.

TOUCH DISPLAY

The resistive touch display responds to pressure and is used to trigger functions (e.g. trigger an alarm, make a voice announcement, establish a call to another subscriber, etc.) and can also be used with industrial gloves.



MODULE OVERVIEW



Type	12 AP 7x1
Description	IP desktop intercom station with 7" color touch display, 12 mechanical keys with integrated signaling function, 3 function keys, network interface included for the connection to INTRON-X / INTRON-D <i>plus</i> systems. Display layout: 1 layer with 20 display keys, dial keypad and service layer. Redundant network interface at intercom stations of type 12 AP 711.
Type number	302-051-000 (12 AP 701) 302-052-000 (12 AP 711)
W x H x D	267 mm x 80 mm x 242 mm (10.51" x 3.15" x 9.53")
Weight	Approx. 2.5 kg (approx. 5.51 lbs)
Color	Graphite black (RAL 9011)



Type	24 APK 01
Description	Additional keypad with 24 mechanical keys, integrated signaling function and protective labels. It is used to expand the IP desktop intercom station of the AP series. An optional key cover is available. (→ page 4).
Type number	302-050-000
W x H x D	86 mm x 80 mm x 242 mm (3.39" x 3.15" x 9.53")
Weight	Approx. 0.7 kg (approx. 1.54 lbs)
Color	Graphite black (RAL 9011)



Type	1 APH 01
Description	Handset with cradle, can be used together with the IP desktop intercom stations of the AP series
Type number	302-050-200
W x H x D	86 mm x 98 mm x 242 mm (3.39" x 3.86" x 9.53")
Weight	Approx. 0.8 kg (approx. 1.76 lbs)
Color	Graphite black (RAL 9011)

ACCESSORIES



Type	Universal power adapter 48 V
Description	For power supply without Power-over-Ethernet (PoE), interchangeable power plugs, can be used worldwide (Asia, Australia, Europe, UK, and USA), cable length approx. 1.4 m (4.59 ft), DC plug with internal diameter 2.1 mm (0.08") and outer diameter 5.5 mm (0.22"), input voltage 90 V AC to 264 V AC / 47 Hz to 63 Hz, output voltage 48 V DC / 0.5 A
Type number	309-042-500



Type	Key cover for 8 keys
Description	Transparent plastic key cover for the 24 APK 01 additional keypad to protect the upper 8 keys against accidental actuation. You can only press these keys if the key cover is open.
Type number	302-050-050



Type	Screen protector
Description	To protect the touch display against scratches and dirt; self-adhesive, resistant to dust and grease, anti-reflection coating
Type number	302-051-052

TECHNICAL DATA

ELECTRICAL DATA

Power supply	PoE according to 802.3af, Class 3, 15 W or external power supply (42 V DC to 57 V DC, 0.3 A at 48 V DC)
Typical power consumption	6 W
Amplifier power	2 x 0.75 W
Frequency range	200 Hz to 16000 Hz
Speaker	2 x 8 W / 8 Ohms
Sound pressure level (distance of 50 cm (19.69 ft))	90 dB (+/-3 dB)
Touch display	17.8 cm (7"), 800 x 480 pixels, resistive

INTERFACES

1 x RJ45 port 10/100 MBit/s (LAN + PoE) for intercom stations of type x AP 701
2 x RJ45 port 10/100 MBit/s (LAN + PoE) for intercom stations of type x AP 711
1 x DC power jack (for external power supply) inner diameter: 2.1 mm (0.08"), outer diameter: 5.5 mm (0.22")
1 x 9-pin D-sub female connector (currently without function)
1 x Mini USB service port

NETWORK REQUIREMENTS

Power over Ethernet (PoE) recommended
IPv4 network
Support of UDP, SCTP, RTP and RTCP protocols
Quality of Service (QoS) Ideal latency value < 20 ms (max. 50 ms) Jitter: max. 10 ms
10Base-T/100Base-TX Ethernet (IEEE 802.3), 100 MBit/s recommended
200 kBit/s basic bandwidth and 200 kBit/s per active audio channel

ENVIRONMENTAL REQUIREMENTS AND STANDARDS

Ambient temperature during operation	-10 °C to +50 °C (-14 °F to +122 °F)
Relative humidity (non-condensing)	Max. 95 %
Degree of protection	IP42
EMC	IEC/EN 61000-6-2 IEC/EN 61000-6-4

SERIES OVERVIEW CHART



Type	Handset	Basic Device	Additional Keypad*	Redundant Network Interface	Type Number
12 AP 701		x			302-051-000
12 AP 711		x		x	302-052-000
36 AP 701		x	1		302-051-100
36 AP 711		x	1	x	302-052-100
60 AP 701		x	2		302-051-200
60 AP 711		x	2	x	302-052-200
84 AP 701		x	3		302-051-300
84 AP 711		x	3	x	302-052-300
108 AP 701		x	4		302-051-400
108 AP 711		x	4	x	302-052-400
12 AP 701H	x	x			302-051-500
12 AP 711H	x	x		x	302-052-500
36 AP 701H	x	x	1		302-051-600
36 AP 711H	x	x	1	x	302-052-600
60 AP 701H	x	x	2		302-051-700
60 AP 711H	x	x	2	x	302-052-700
84 AP 701H	x	x	3		302-051-800
84 AP 711H	x	x	3	x	302-052-800
108 AP 701H	x	x	4		302-051-900
108 AP 711H	x	x	4	x	302-052-900

*All types with additional keypads can be ordered with a key cover for 8 keys (e.g.: type 36 AP 701/C8 has the type number 302-051-100/C8). Other types of intercom stations are available upon request.

ACTIVATIONS

Type Number	Description
101-100-002	ACT-IP Device Activation for the connection of one INDUSTRISTRONIC IP device to the INTRON-X / INTRON-D plus system
101-100-004	ACT-IP Device connected redundantly Activation for a redundant connection of one INDUSTRISTRONIC IP device to the INTRON-D plus system
101-200-201	ACT-AP 6 Operating Layers Activation of 6 operating layers with up to 120 configurable buttons for the INDUSTRISTRONIC IP intercom station of the AP series
101-200-202	ACT-AP 10 Operating Layers Activation of 10 operating layers with up to 200 configurable buttons for the INDUSTRISTRONIC IP intercom station of the AP series

© INDUSTRISTRONIC