

Tiandy



TC-C35XS Spec: I3/E/Y/(M)/2.8mm/V4.0

5MP Fixed Starlight IR Turret Camera

Lite Series



KEY FEATURES

- Default: Metal+Plastic, M: Metal Housing
- Up to 2592x1944@20fps
- S+265/H.265/H.264
- Min. illumination Color: 0.002Lux@F1.6
- 120dB WDR
- Smart IR, IR Range: 30m
- Support tripwire and perimeter
- Built-in Mic, SD Card Slot, Reset Button
- Operating Conditions -40°C~60°C, 0~95% RH
- POE, IP67



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com Tel: +86-22-58596178
Website: en.tiandy.com Fax: +86-22-58596048



SPECIFICATIONS

| | |
|-----------------------------|--|
| Camera | |
| Image Sensor | 1/2.8" CMOS |
| Signal System | PAL/NTSC |
| Min. Illumination | Color:0.002Lux@(F1.6,AGC ON),B/W:0Lux with IR |
| Shutter Time | 1s to 1/100,000s |
| Day & Night | Dual IR Cut Filter with Auto Switch |
| WDR | 120dB |
| Angle Adjustment | pan 0~340°,tilt 0~75°,roate 0~360° |
| Lens | |
| Lens Type | Fixed |
| Focus | 2.8mm |
| Lens Mount | M12 |
| Aperture | F1.6,Fixed |
| FOV | Horizontal field of view:94.7°; Vertical field of view:71.2° |
| Illuminator | |
| IR LEDs | 2 |
| IR Range | Up to 30m |
| Wavelength | 850nm |
| White LEDs/Warmlights | N/A |
| Compression Standard | |
| Video Compression | S+265/H.265/H.264 |
| Video Bit Rate | 32Kbps~6Mbps |
| Audio Compression | G.711A/G.711U/ADPCM_D |
| Audio Bit Rate | 8K,32K,48Kbps |
| Image | |
| Max. Resolution | 2592x1944 |
| Main Stream | PAL:20fps(2592x1944,2592x1520),25fps(2560x1440,2304x1296,1920x1080,1280x720) NTSC:20fps(2592x1944,2592x1520),25fps(2560x1440),30fps(2304x1296,1920x1080,1280x720) |
| Sub Stream | PAL:25fps(704x576,704x288,640x360,352x288) NTSC:30fps(704x480,704x240,640x360,352x240) |
| Third Stream | N/A |
| Image Setting | Saturation,brightness,contrast,sharpness,adjustable by client software or web browser |
| Image Enhancement | BLC/3D DNR/HLC |
| ROI | N/A |
| OSD | 16x16,32x32,48x48,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions |
| Picture Overlay | N/A |
| Privacy Mask | Yes,4 regions |
| Smart Defog | Yes |
| Feature | |
| Alarm Trigger | Motion Detection,Mask Alarm,IP Address Conflict |
| Video Analytics | Tripwire,Perimeter |
| Early Warning(EW) | N/A |
| Network | |
| ANR | Yes(Only Support Tiandy ANR NVR) |
| Protocols | HTTP,TCP/IP,ICMP,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,UPnP,UDP |
| System Compatibility | ONVIF(PROFILE S/T/G),SDK,CGI,Milestone,P2P(Mutually exclusive with Profile G) |
| Remote Connection | 2 |
| Client | Easy7,EasyLive |
| Web Version | Web6 |

Tiandy

| Interface | |
|-------------------------|--|
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port |
| Audio I/O | Mic in |
| Alarm I/O | N/A |
| Speaker | N/A |
| Reset Button | Yes |
| On-board storage | Built-in MicroSD card slot, up to 512 GB |
| General | |
| Web Client Language | 17 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebrew, Arabic, Vietnamese, German, Ukrainian |
| Operating Conditions | -35°C~60°C, 0~95% RH |
| Power Supply | DC 12V±25%, PoE(802.3af) |
| Power Consumption | MAX:6W(12V) MAX:8W(PoE) |
| Protection | IP67 |
| Heater | N/A |
| Dimensions | 116.6 83.7mm(4.59 3.30inch) |
| GrossWeight | Metal+Plastic:0.51Kg(1.12lb) Metal:0.64Kg(1.41lb) |
| NetWeight | Metal+Plastic:0.34Kg(0.75lb) Metal:0.47Kg(1.03lb) |

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.


AVAILABLE MODEL

TC-C35XS SPEC: I3/E/Y/2.8MM/V4.0

TC-C35XS SPEC: I3/E/Y/M/2.8MM/V4.0


Tiandy

DIMENSIONS

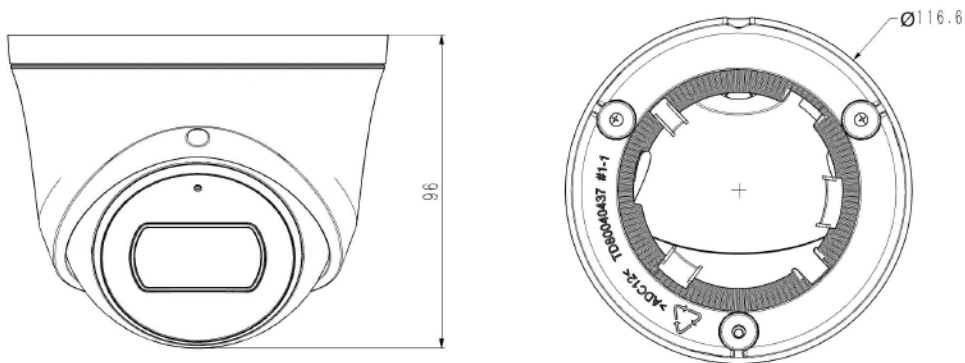

ACCESSORIES

A29
A29 WALL MOUNT



TC-P54BM SPEC: V5
JUNCTION BOX



A36
POLE MOUNT

A35
CORNER MOUNT



DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596178
Fax: +86-22-58596048